

PEER-LIFT® EYE CRADLE GRAB HOOKS

The Peer-Lift® Eye Cradle Grab Hook is an excellent choice for overhead lifting and is also suitable for other applications. The hook is engineered to cradle the chain, therefore keeping 100% of its Working Load Limit. Proof tested at twice the Working Load Limit and fatigue tested at 1.5 times the Working Load Limit for 20,000 cycles, this eye cradle grab hook proves itself as a reliable choice. This Peer-Lift® hook meets or exceeds ASTM A952 and OSHA 1910 standards.



PEER-LIFT® EYE CRADLE GRAB HOOKS

GRADE

- 80

FINISH

- Black Enamel

STANDARDS

- Proof tested at twice the Working Load Limit
- Fatigue tested at 1.5 times the working load limit for 20,000 cycles
- Meet or exceed ASTM A952 and OSHA 1910 standards

ATTACHMENT

- Eye

HEAT TREATMENT

- Quenched and tempered before proof testing

HOOK TYPE

- Cradle Grab Hook

APPLICATION


- Overhead Lifting
- Chain tightening, tie down

MATERIAL

- Premium Fine Grain Alloy Steel

PEER-LIFT® EYE CRADLE GRAB HOOKS

DIAGRAM DRAWINGS

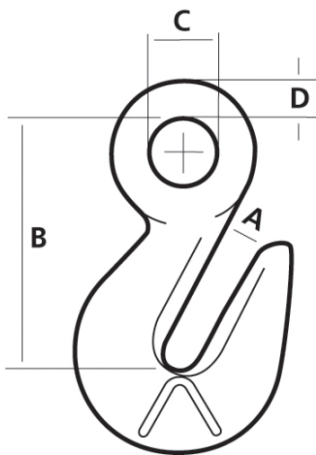

PEER-LIFT® EYE CRADLE GRAB HOOKS

PRODUCTS SPECIFICATIONS

Product	Chain Size Inches	Chain Size mm	Dim A (in.)	Dim B (in.)	Dim C (in.)	Dim D (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
8527280	9/32	7	0.390	2.360	0.590	0.350	0.5	3500
8527480	3/8	10	0.510	3.330	0.790	0.510	1.3	7100
8527680	1/2	13	0.630	4.090	0.980	0.590	2.7	12000
8527780	5/8	16	0.710	4.490	1.180	0.790	4.4	18100