

# V10™ CLEVIS SELF-LOCKING HOOKS

---

The V10™ Clevis Self-locking Hook features a positive locking latch that ensures safety and security during lifts and while under load. Quenched and tempered before proof testing, the V10™ Clevis Self-locking Hook meets or exceeds OSHA, Government, NACM, and ASTM specs. All V10™ products are accompanied with a product test certificate.



# V10™ CLEVIS SELF-LOCKING HOOKS

---

## GRADE

- 100

## FINISH

- Blue Powder Coat Finish

## STANDARDS

- Meets or exceeds ASTM A952, NACM, & OSHA 910 Standards
- Fatigue Tested at 1.5 times the WLL for 20,000 cycles
- Proof Tested at twice the WLL
- Safety factor 4:1

## ATTACHMENT

- Clevis

## HEAT TREATMENT

- Quenched and tempered before proof testing

## ORIGIN

- Made in Italy

## HOOK TYPE

- Self-locking Hook

## APPLICATION


- Overhead Lifting

## MATERIAL

- Premium Fine Grain Alloy Steel

# V10™ CLEVIS SELF-LOCKING HOOKS

## DIAGRAM DRAWINGS

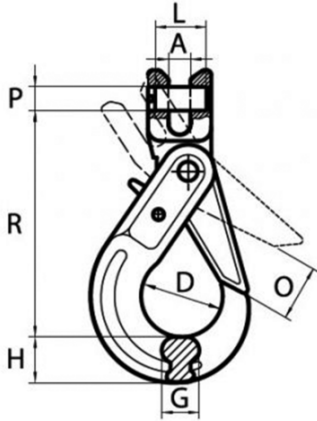

# V10™ CLEVIS SELF-LOCKING HOOKS

## PRODUCTS SPECIFICATIONS

Product	Manufacturer Part No.	Chain Size Inches	Chain Size mm	Dim A (in.)	Dim D (in.)	Dim G (in.)	Dim H (in.)	Dim O (in.)	Dim P x L (in.)	Dim R (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
8498100	CRFX06	7/32	6	0.264	1.378	0.63	0.807	1.102	0.29 x 0.65	3.7	1.1	2700
8498200	CRFX07	9/32 - 5/16	7-8	0.335	1.713	0.787	1.024	1.339	0.38 x 0.91	4.843	2.12	5700
8498400	3/8	10	0.472	2.205	0.965	1.181	1.772	0.49 x 1.16	5.65	3.53	8800	
8498600	CRFX13	1/2	13	0.591	2.717	1.358	1.575	2.028	0.63 x 1.46	7.067	6.9	15000
8498800	CRFX20	5/8	16	0.748	3.15	1.398	1.969	2.362	0.79 x 2.05	8.543	12.79	22600