

PEER-LIFT® CLEVIS CRADLE GRAB HOOKS

The Peer-Lift® Clevis Cradle Grab Hook is an excellent choice for overhead lifting and is also suitable for other applications. The whole chain link is supported by the cradle, therefore keeping 100% of its Working Load Limit. A reliable choice, proof tested at twice the Working Load Limit, and fatigue tested at 1.5 times the Working Load Limit for 20,000 cycles. It meets or exceeds ASTM A952 and OSHA 1910 standards.

Applications include chain tightening, tie down, and lifting in industries such as construction, automotive, aircraft and farming.



PEER-LIFT® CLEVIS CRADLE GRAB HOOKS

GRADE

- 80

FINISH

- Black Powder Coat Finish

STANDARDS

- Proof tested at twice the Working Load Limit
- Fatigue tested at 1.5 times the working load limit for 20,000 cycles
- Meet or exceed ASTM A952 and OSHA 1910 standards

ATTACHMENT

- Clevis

HEAT TREATMENT

- Quenched and tempered before proof testing

HOOK TYPE

- Grab Hook

APPLICATION


- Overhead Lifting
- Chain tightening, or tie down

MATERIAL

- Premium Fine Grain Alloy Steel

PEER-LIFT® CLEVIS CRADLE GRAB HOOKS

DIAGRAM DRAWINGS

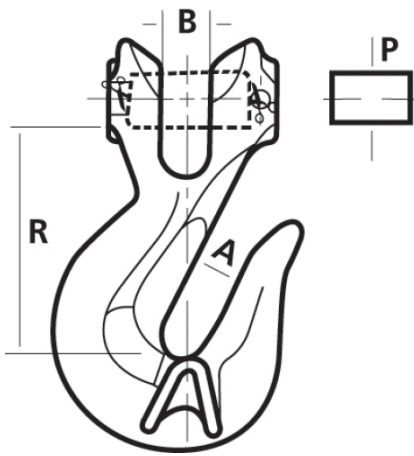

PEER-LIFT® CLEVIS CRADLE GRAB HOOKS

PRODUCTS SPECIFICATIONS

Product	Chain Size Inches	Chain Size mm	Dim A (in.)	Dim B (in.)	Dim P (in.)	Dim R (in.)	Lbs. Per Ea.	Working Load Limit (Lbs.)
8528280	9/32	7	0.391	0.391	0.359	1.078	0.8	3500
8528480	3/8	10	0.516	0.516	0.484	2.719	1.7	7100
8528680	1/2	13	0.625	0.625	0.625	3.324	3.2	12000
8528780	5/8	16	0.719	0.719	0.703	3.938	6.4	18100